




THE EUROTAINER T11/T12 TYPE

5000 and 10000 LITRE TEN FOOT SMALL PORTABLE TANKS

For the Transport and Storage of Liquid Products

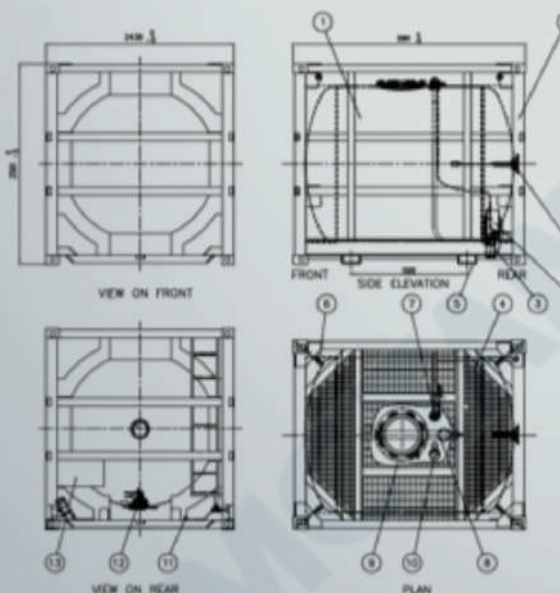

- / Chemical grade and Food grade tanks
- / Full frame design
- / Low tare weight
- / Insulated and fitted with heating coils
- / Global availability
- / 316L stainless steel barrel
- / Two 10 foot tanks can be connected to create a virtual 20 foot tank
- / Pressure relief valve for safety
- / Multiple specification options

THE EUROTAINER T11 TYPE 5000 and 10000 LITRE TEN FOOT SMALL PORTABLE TANKS

STANDARD SPECIFICATIONS*

Capacity	5000 litre/ 1320 US Gallon 10000 litre/ 2641 US Gallon	Top Discharge	Optional, provisions on top in manway spill box
T Code	T11/T12, UN Portable Tank	Bursting disc	Fitted under safety relief valve, set at 4.84 bar
Maximum Gross Weight	17500 kgs	Earth connection / grounding	One (1) stainless steel lug
Length:	10 feet (3.048 meter)	Manway	Stainless steel, 500 mm/ 20 inch/ DN 50 diameter with 8 swing bolt closures and PTFE gasket.
Width	8 feet (2.438 meter)	Air Line	1 inch stainless steel ball valve
Height	8 feet, 6 inch (2.591 meter)	Filling Port/Spare Connection	3 inch with blind flange connection
Barrel Material	316L stainless steel, 4.4 mm thickness	Spill boxes	Fitted with drain tubes
Frame Material	Carbon steel, full frame type	Safety Devices	65 mm/2.5 inch pressure high flow relief valve set at 4.4 bar / 64 psi.
Tare Weight	5000L: 2200 kg 10000L: 2700 kg	Bottom discharge	3 inch butterfly valve
Working Pressure	4 bar/ 58 psi	Manometer/ Thermometer	Temperature readings in C and F
Test Pressure	6 bar/ 87 psi	Design Code	ASME sect. VIII, div. 1
Design Temp	120 C	Provisional openings	2 x DN 50 (50 mm) provisions
Ladder	Fitted to the end of the tank	Insulation and Cladding	50 mm insulation and GRP Cladding
Document Holder	One (1) water resistant PVC document tube	Heating/Cooling	Coils with 2.5 square meters effective heating surface

* All specification details are based on the T11/T12 ten foot type small portable tank in the Eurotainer fleet. Specifications may vary based on a selected tank container. For more specific details please contact your local Eurotainer office. Our full office list can be found on our website at www.eurotainer.com

Approvals: All global approvals for international transport including UN Portable tank, IMDG, RID/ADR, US DOT/CFR 49, UIC, CSC, TC Impact and other approvals.

Specification Options:

Top discharge with siphon tube, bolted manway, offshore certification, lining/coating, level gauges, GPS tracking and telemetry systems, lined/coated valves, various valve connections and fittings, specialized twist locks to link two tanks together, steam heating coils, electric heating, air actuated valves and dry couplings, etc.

GO TO WWW.EUROTAINER.COM FOR MORE INFORMATION



Part of
STREAM

